


● **Outer dimensions (mm)**

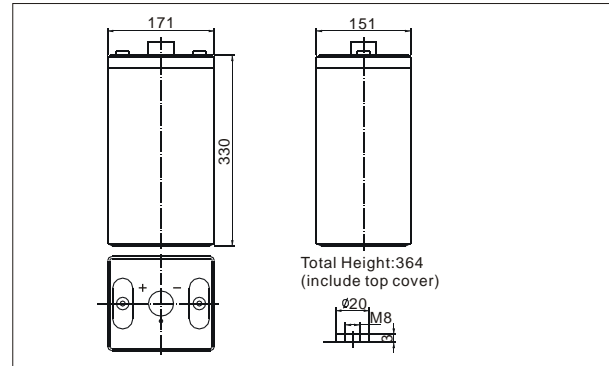

TianChang sealed lead-acid rechargeable battery (VRLA battery) is leak-proof and maintenance free. The Superiority of VRLA battery is derived from its uniquely efficient oxygen recombination technology. The oxygen evolved from the positive plates diffuses through the micro porous glass fiber mat to the negative plates where it is changed back to water by recombination reaction, eliminating the need for water addition. The result is a maintenance free battery.

● **Battery Construction**

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

● **General Features**

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.


● **Application**

- Medical Equipment
- Cable Television
- Control Equipment
- UPS
- Communication Equipment
- Emergency power System
- Security System


● **Specifications**

Nominal Voltage		2V
Capacity (10 hr 25°C)		250Ah
Design Life		20 Years
Dimensions	Length	171 mm (6.73 inch)
	Width	151 mm (5.94 inch)
	Height	330 mm (12.99 inch)
	Total Height	364 mm (14.33inch)
Approx. Weight		<b>16 Kg</b>
Capacity 25°C (77°F)	10 hr rate	250Ah
	3 hr rate	200Ah
	1 hr rate	162.50Ah
Internal Resistance (Full charged Battery at 25°C (77°F))		0.7m Ω
Capacity affected by Temperature (20hr)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge at 25°C	3 month	Remaining capacity: 91%
	6 month	Remaining capacity: 82%
	12 month	Remaining capacity: 65%
Normal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range		-15°C ~ 50°C (5 ~ 122°F)
Float charging voltage (25°C)		2.27 to 2.30V
Cyclic charging voltage (25°C)		2.42 to 2.48V
Maximum charging current		50A
Terminal material		Copper
Maximum Discharge current		1875A (5sec)


**Charge characteristic Curve for standby use**

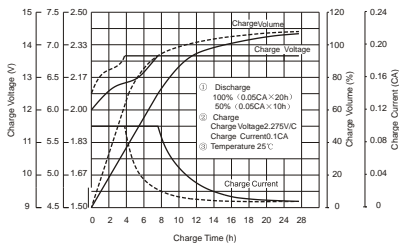


**Discharge characteristic (25°C/77°F)**

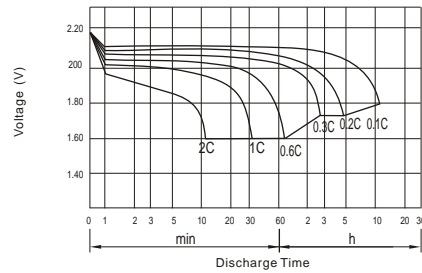


**Relationship between charging voltage and temperature**

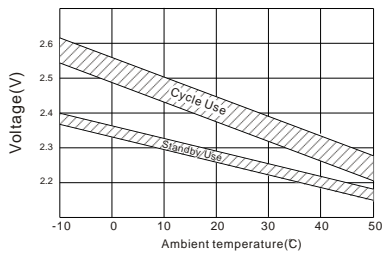


**Self-discharge characteristic**

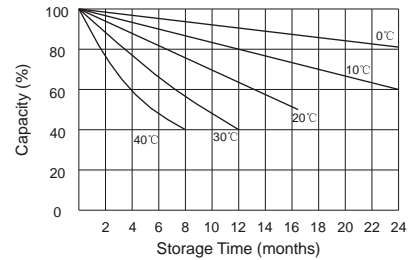


**Temperature effects on float life**

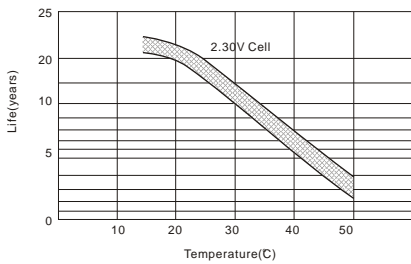


**Temperature effects on capacity**

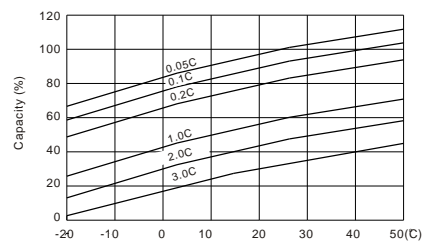

**Life characteristics of Standby use**

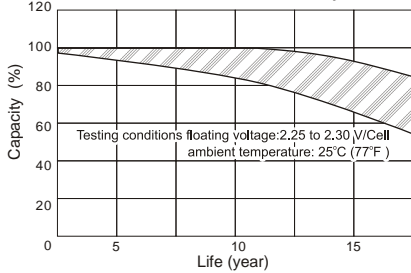

**Cycle service life in relation to depth of discharge**

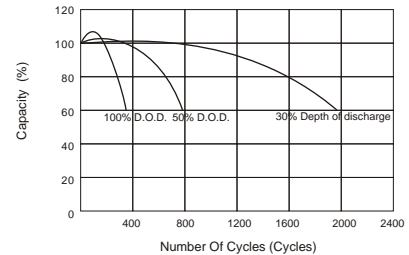

**Discharge Constant Current (Amperes at 77°F/25°C)**

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	339.4	250.3	161.1	95.76	71.32	56.86	47.88	40.21	32.46	27.13
1.65V	322.8	240.4	154.1	92.27	68.33	54.86	45.89	39.24	31.01	26.66
1.70V	301.0	226.6	151.1	90.77	66.83	54.36	45.39	38.28	30.52	26.18
1.75V	267.2	203.9	139.2	85.79	63.34	51.37	43.39	36.34	29.55	25.69
1.80V	230.0	185.7	131.2	81.80	60.85	50.87	41.90	35.85	29.07	25.21
1.85V	194.5	167.2	121.2	77.31	57.86	46.88	39.90	33.92	27.62	23.51

**Discharge Constant Power (Watts at 77°F/25°C)**

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	594.2	456.2	295.0	177.4	132.9	106.8	90.49	77.59	61.77	52.38
1.65V	578.7	453.8	294.0	174.8	130.3	105.3	89.46	76.60	61.25	51.89
1.70V	546.6	429.5	288.6	172.3	128.3	104.8	88.67	74.82	60.31	51.08
1.75V	486.9	387.0	265.8	163.1	123.7	99.59	84.95	71.13	58.41	50.27
1.80V	421.5	353.1	250.7	155.7	118.6	99.13	82.19	70.29	57.47	48.47
1.85V	359.4	318.4	231.7	147.4	113.0	91.82	78.44	66.59	54.61	46.67

(Note)The above characteristics data are average values.