

TC12-40-G 12V40Ah/20hr

Design Life: 12 years

Gel battery shows some distinctive advantages over flooded battery or AGM battery, such as super thermal stability, high deep discharge capability, good recovery from deep discharge, even if the battery is left discharged for three days, it will recover to 100% of capacity. With the above-mentioned advantages, the gel battery has long service life, specially suitable for motive power applications, such as golf trailer, srubber, folklift, etc. The deep discharge cycles increased 50% as compared with the AGM battery.

Battery Construction



Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	PVC	Gelled acid

General Features

- Nanometer SiO₂ and H₂SO₄ gelled electrolyte technology for efficiency gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.

Dimensions and Weight

Length(mm / inch)	197.5 / 7.78
Width(mm / inch)	165.5 / 6.52
Height(mm / inch)	170 / 6.69
Total Height(mm / inch)	170 / 6.69
Approx. Weight(Kg / lbs)	14.7 / 32.4

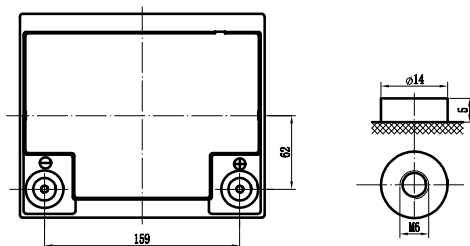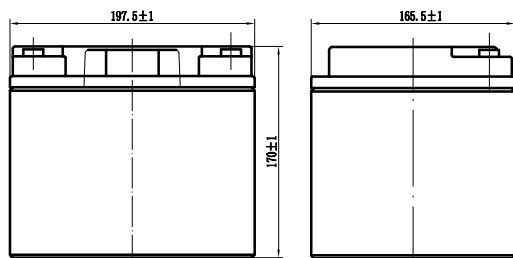

Performance Characteristics

Nominal Voltage	12V
Number of cell	6
Design Life	12 years
Nominal Capacity 77°F(25°C)	
20 hour rate (2.0A, 10.8V)	40Ah
10 hour rate (3.88A, 10.8V)	38.8Ah
5 hour rate (6.97A, 10.5V)	34.85Ah
1 hour rate (25.5A, 9.6V)	25.5Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	9.0mOhms
Self-Discharge	
2% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	500A(5s)
Short Circuit Current	1300A
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	14.28-14.52V
Maximum charging current	16.5A
Temperature compensation	-20mV/°C
Standby use	13.38-13.68V
No charge current limit is required	
Temperature compensation	-30mV/°C

Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/Cell	5min	10min	15min	30min	45min	1h	3h	5h	10h	20h
1.60V	125	89.4	71.2	41.0	30.7	25.5	10.6	7.32	4.14	2.08
1.65V	118	85.0	66.9	39.7	30.0	25.2	10.3	7.20	4.08	2.06
1.70V	113	80.5	64.8	38.0	29.9	24.8	10.1	7.07	4.02	2.04
1.75V	105	76.1	63.0	37.1	28.7	24.5	9.85	6.97	3.95	2.02
1.80V	96.2	69.1	57.0	35.4	28.3	23.4	9.62	6.77	3.88	2.00

Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	239	170	137	90.6	68.6	54.8	30.8	22.8	14.9
1.65V	222	157	124	80.9	62.5	50.4	28.7	21.5	14.0
1.70V	205	149	120	78.3	59.3	49.6	27.9	20.7	13.8
1.75V	189	142	117	75.8	58.1	48.8	27.4	20.4	13.6
1.80V	177	135	113	73.2	56.9	47.9	26.9	20.0	13.5

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.

