


● **Outer dimensions (mm)**

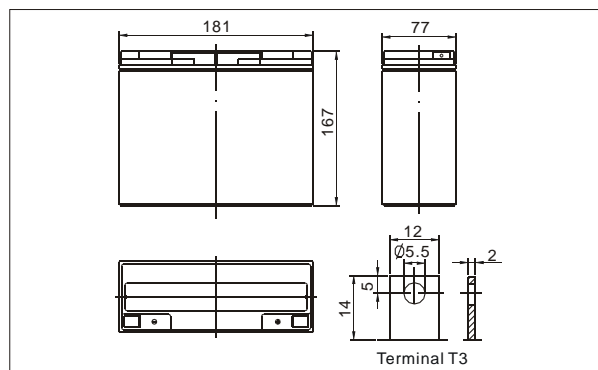

TianChang sealed lead-acid rechargeable battery (VRLA battery) is leak-proof and maintenance free. The Superiority of VRLA battery is derived from its uniquely efficient oxygen recombination technology. The oxygen evolved from the positive plates diffuses through the micro porous glass fiber mat to the negative plates where it is changed back to water by recombination reaction, eliminating the need for water addition. The result is a maintenance free battery.

● **Battery Construction**

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

● **General Features**

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

● **Application**


- Alarm System
- Medical Equipment
- Cable Television
- Control Equipment
- UPS
- Communication Equipment
- Toys
- Emergency power System
- Power Tools
- Security System

● **Specifications**


Nominal Voltage		12V
Capacity (20 hr 25°C)		17Ah
Design Life		5 Years
Dimensions	Length	181mm (7.13 inch)
	Width	77mm (3.03 inch)
	Height	167 mm (6.57 inch)
	Total Height	167mm (6.57 inch)
Approx. Weight		5.20Kg
Capacity 25°C (77°F)	20 hr rate	17Ah
	10 hr rate	15.81Ah
	5 hr rate	14.45Ah
	1 hr rate	10.20Ah
Internal Resistance (Full charged Battery at 25°C (77°F))		18m Ω

Capacity affected by Temperature (20hr)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge at 25°C	3 month	Remaining capacity: 91%
	6 month	Remaining capacity: 82%
	12 month	Remaining capacity: 65%
Normal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range		-15°C ~ 50°C (5 ~ 122°F)
Float charging voltage (25°C)		13.6 to 13.8V
Cyclic charging voltage (25°C)		14.5 to 14.9V
Maximum charging current		6.8A
Terminal material		Copper
Maximum Discharge current		255A (5sec)


Charge characteristic Curve for standby use

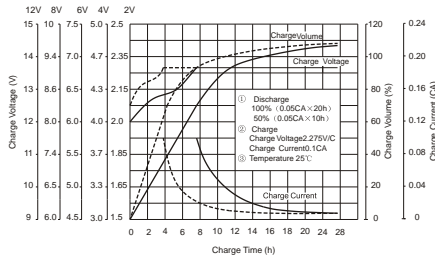


Discharge characteristic Curve

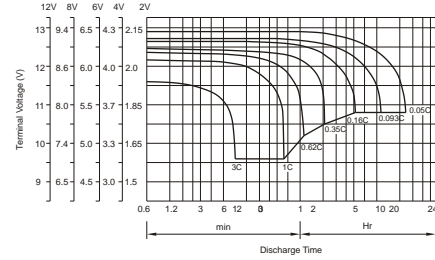


Relationship between charging voltage and temperature

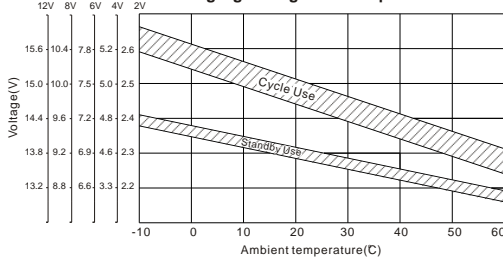


Self-discharge characteristic

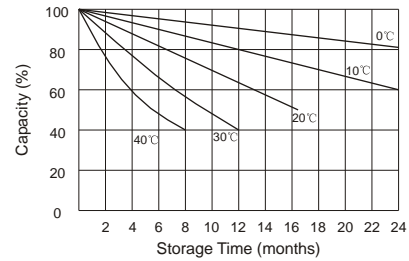


Temperature effects on float life

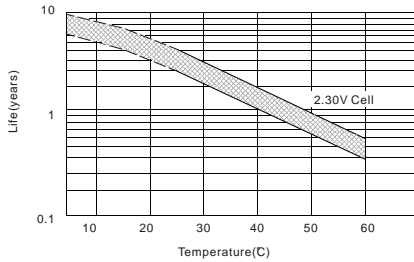


Temperature effects on capacity

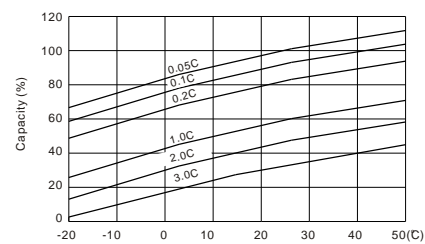

Life characteristics of Standby use

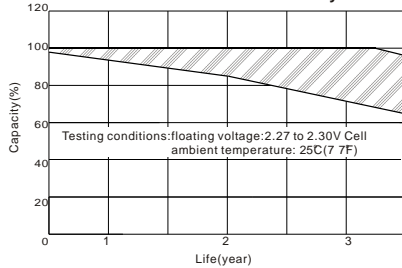

Cycle service life in relation to depth of discharge

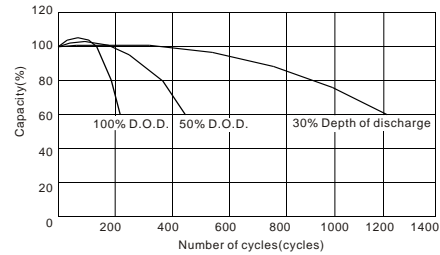

Constant current discharge ratings-amperes at 25

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	63.9	44.7	34.0	19.2	11.4	4.79	3.13	1.73	0.89
1.65V	60.7	42.7	32.4	18.4	11.2	4.64	3.04	1.70	0.87
1.70V	57.1	40.3	30.7	17.6	11.0	4.48	2.96	1.67	0.86
1.75V	53.5	37.9	29.0	16.7	10.5	4.29	2.87	1.65	0.85
1.80V	49.9	35.9	27.4	15.9	9.98	4.10	2.78	1.61	0.83

Constant power discharge ratings-watts at 25

End Point Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	118	82.7	63.3	35.8	21.5	9.06	5.95	3.31	1.71
1.65V	112	78.6	59.9	34.2	21.0	8.72	5.75	3.23	1.67
1.70V	104	73.8	56.5	32.6	20.4	8.39	5.56	3.15	1.64
1.75V	97.3	69.0	53.2	30.8	19.4	7.98	5.37	3.10	1.61
1.80V	89.8	64.6	49.6	28.9	18.3	7.54	5.15	3.00	1.56